

# AH11C

*ElettroMagnetic Services*  
SRL

## AXIAL HELIX ANTENNA

- High gain, circularly polarized directional antenna
- Tilttable stainless steel bracket and hardware
- Customization available



### ELECTRICAL

Frequency	2300 ÷ 2800 MHz
Polarization	right hand circular (RHCP)
VSWR	< 1.5 across band
Gain	14.5 dBic (average)
Front-to-back ratio	> 28 dB
Half power beamwidth	30° (Az) × 30° (El)
Power rating	25 W cw
Lightning protection	DC grounded


### MECHANICAL

Connector	N-female, 50 Ω
Dimensions	350 (helix length) × 34 (helix dia.) × 140 (reflector dia.) mm
Mass	800 g (mounting hw included)
Wind loading	4 kg @ 150 km/h
Standard finish	RAL 7035 (light grey) stainless steel bracket


### MOUNTING

Standard interface	tiltable rear bracket
Mast diameter range	40 ÷ 60 mm


Azimuth pattern

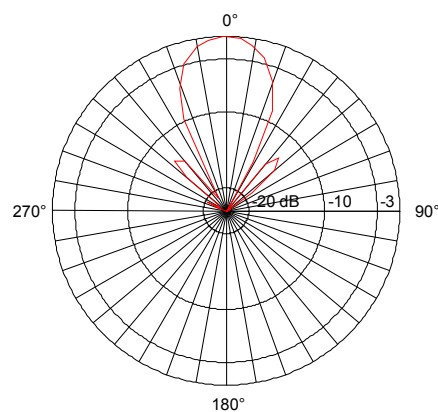

Elevation pattern

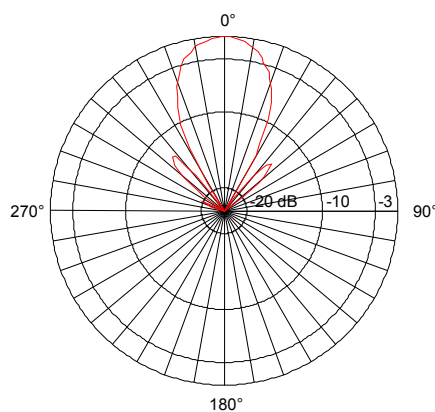

Gain curve

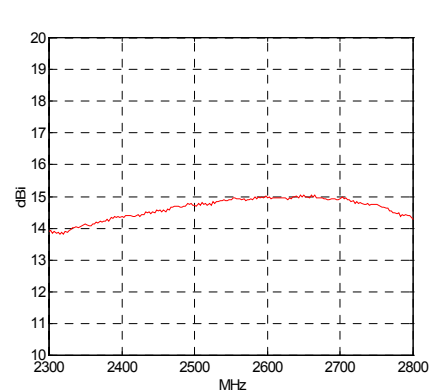

Due to technical improvements, specifications provided in this data sheet may change without notice.  
Whilst every effort is made to ensure an high degree of accuracy to all specifications here reported, no responsibility can be accepted for any errors or omissions.  
Any reproduction, full or partial, of this document and its contents is not allowed without factory authorization.

Since **ElettroMagnetic Services** is specialized in development and production of custom antennas, if you need electrical and/or mechanical modifications of this product to meet a particular application or requirements, please feel free to contact us directly.

### HEADQUARTERS

**ElettroMagnetic Services srl**  
via S. Pertini, 6  
26019 VAILATE (CR) - ITALY  
Tel +39 (0) 363 84086  
Fax +39 (0)363 341636  
Email [info@elettromagneticservices.com](mailto:info@elettromagneticservices.com)

Issued: 02.05.05  
Updated: 10.10.16