


DK1511V

ElettroMagnetic Services
SRL

OMNI DISKONE

- Broadband, low VSWR
- Direct plug in on a N-female panel connector
- Customization available

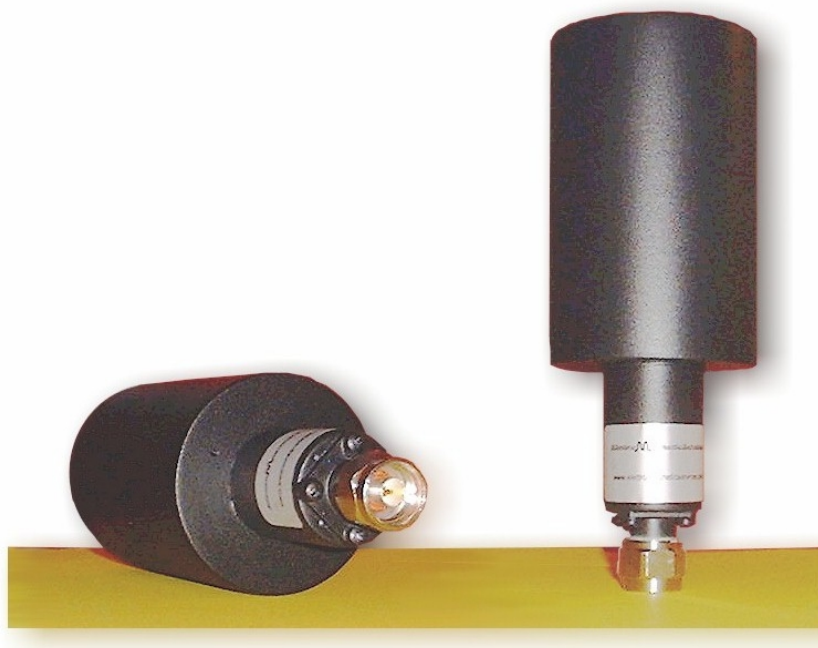

ELECTRICAL

Frequency	2000 ÷ 3000 MHz
Input impedance	50 Ω
Polarization	linear vertical
VSWR	< 1.5 across band
Gain	2 dBi
Half power beamwidth	360° × ≈90°
Power rating	10 W cw


MECHANICAL

Connector	N-male
Height × radome dia.	155 × 70 mm
Mass	230 g
Standard finish	polycarbonate radome, scratchproof texturized black


MOUNTING

Standard interface	direct plug in on a N-female panel connector
--------------------	---


Azimuth pattern

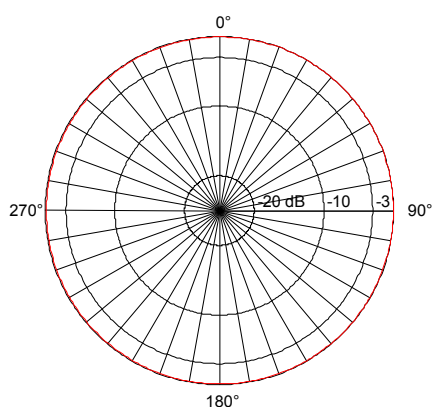

Elevation pattern

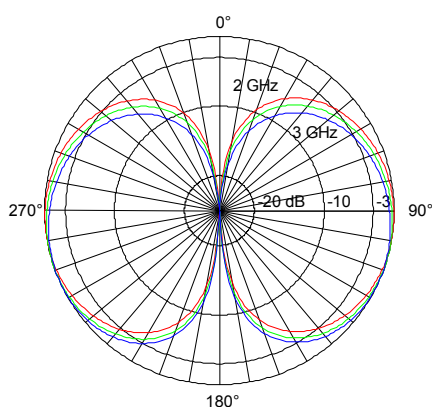

VSWR

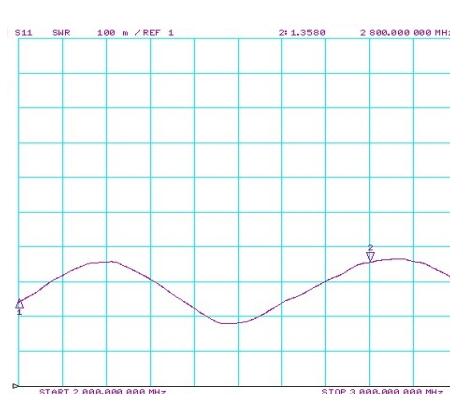

Due to technical improvements, specifications provided in this data sheet may change without notice.
Whilst every effort is made to ensure an high degree of accuracy to all specifications here reported, no responsibility can be accepted for any errors or omissions.
Any reproduction, full or partial, of this document and its contents is not allowed without factory authorization.

Since **ElettroMagnetic Services** is specialized in development and production of custom antennas, if you need electrical and/or mechanical modifications of this product to meet a particular application or requirements, please feel free to contact us directly.

HEADQUARTERS

ElettroMagnetic Services srl
via S. Pertini, 6
26019 VAILATE (CR) - ITALY
Tel +39 (0) 363 84086
Fax +39 (0) 363 341636
Email info@elettromagneticservices.com

Issued: 31.01.06
Updated: 28.10.16