

UP9V12

ElettroMagnetic Services
SRL

DIRECTIONAL PANEL

- For point to point connections, 12 dBi gain
- Tilttable stainless steel bracket and hardware
- Other bands upon request



ELECTRICAL




Frequency	3400 ÷ 3600 MHz
Polarization	linear vertical
VSWR	< 1.5 across band
Gain	12 dBi
Front-to-back ratio	> 20 dB
Half power beamwidth	50° (Az) × 28° (El)
Power rating	5 W cw
Lightning protection	DC grounded

MECHANICAL

Connector	N-female, 50 Ω
Dimensions	102(W)×146(H)×45(D) mm
Mass	700 g
Wind loading	2 kg @ 150 km/h
Standard finish	white plastic radome and anod. aluminium reflector

MOUNTING

Standard interface	tiltable rear bracket
Mast diameter range	40 ÷ 60 mm

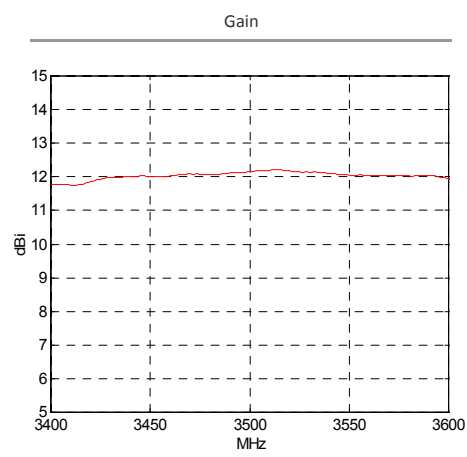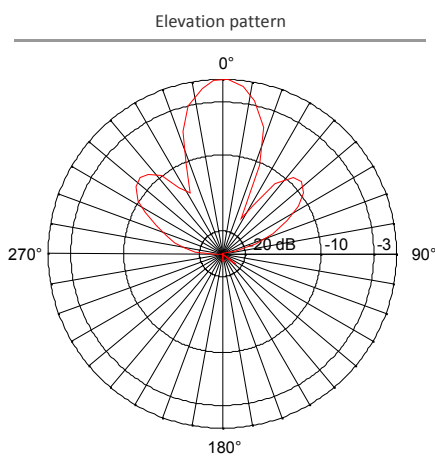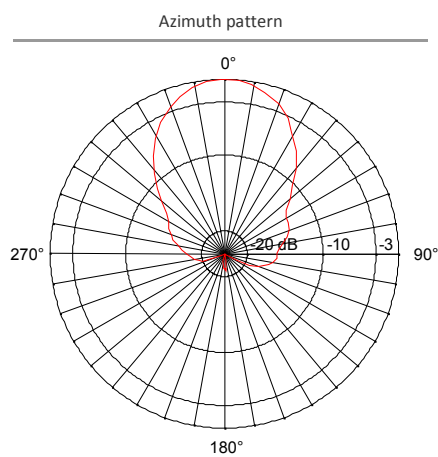

Due to technical improvements, specifications provided in this data sheet may change without notice.
Whilst every effort is made to ensure an high degree of accuracy to all specifications here reported, no responsibility can be accepted for any errors or omissions.
Any reproduction, full or partial, of this document and its contents is not allowed without factory authorization.

Since **ElettroMagnetic Services** is specialized in development and production of custom antennas, if you need electrical and/or mechanical modifications of this product to meet a particular application or requirements, please feel free to contact us directly.

HEADQUARTERS

ElettroMagnetic Services srl
via S. Pertini, 6
26019 VAILATE (CR) - ITALY
Tel +39 (0) 363 84086
Fax +39 (0)363 341636
Email info@elettromagneticservices.com

Issued: 22.05.09
Updated: 26.10.16